

Helsinki 26.7.2001

#3 D 11-9-01  
*Priority Papers*  
J1002 U.S. PTO  
09/960422  
09/21/01

ETUOIKEUSTODISTUS  
PRIORITY DOCUMENT



Hakija  
Applicant

Nokia Mobile Phones Ltd.  
Espoo

Patenttihakemus nro  
Patent application no

20002123

Tekemispäivä  
Filing date

27.09.2000

Kansainvälinen luokka  
International class

H01Q

Keksinnön nimitys  
Title of invention

"Antenna arrangement in a mobile station"  
(Matkaviestimen antennijärjestely)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.

*Eija Solja*  
Eija Solja  
Apulaistarkastaja

Maksu 300,- mk  
Fee 300,- FIM

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500 Telefax: 09 6939 5328  
P.O.Box 1160 Telephone: + 358 9 6939 500 Telefax: + 358 9 6939 5328  
FIN-00101 Helsinki, FINLAND

## Antenna arrangement in a mobile station

### Matkaviestimen antennijärjestely

### Antenna-anordning i en mobil station

The invention concerns generally the technological field of antenna arrangements and EMC (ElectroMagnetic Compatibility) arrangements in mobile stations. Especially the invention concerns decreasing effects of RF radiation of the antenna in electronics of mobile stations. The invention also concerns a mobile station  
5 equipped with such an antenna arrangement.

The evolution of smaller and smaller mobile telephones and other portable radio receivers and transceivers wirelessly communicating personal digital assistants has also promoted the need for antennas that do not protrude outside the smooth contours of the device. However, having the antenna inside the housing of the  
10 mobile station easily causes interference problems between the antenna and other electronics of the mobile station.

Figure 1 illustrates a cross section of a typical mobile station according to the prior art. The mobile station 100 has a helix antenna 101 which is connected to the printed wired board 103 together with other electronics 102. The battery 105 of the  
15 mobile station forms a part of the housing 104. On the front side of the mobile station there is a microphone 106, keyboard 107, display unit 108 and earpiece 109.

Patent document [1] US 5 787 340 discloses an arrangement where a shielding layer is located beside the user and an antenna. Such a shielding layer is illustrated in Figure 1 as 120. A similar solution is also disclosed in article [2] "Reduction of  
20 SAR in Human Head by Suppression of Surface Currents due to a Portable Telephone" by J. Wang and O. Gujiwara, IEICE Trans. Commun., vol. E80-B, pp. 1810-1815. This article discloses an arrangement with low reluctance ferrite sheet disposed on the housing of a portable telephone. These prior art methods can be used also for reducing interference of RF fields to the handset. However, while the  
25 part of the RF radiation is absorbed with the additional shield, a portion of the RF intensity is lost, which means that the efficiency of the antenna may not be optimal. This problem is partially solved in a solution disclosed in patent document US 5 507 012 where reflecting material is used in addition to an absorbing RF shield. This solution, however, is relatively complicated and therefore it is not well suited for  
30 mass production. A further disadvantage with these prior art solutions is their limitation to devices where the antenna is located outside the housing of the mobile

station. Except the antenna, also the shield is visible and makes a negative effect on the appearance and usability of the mobile station. If the antenna would be placed inside the housing there could be interference problems between the antenna and other electronics of the device.

- 5 Patent document [3] US 5 982 335 discloses a a microstrip antenna with a ground plane, microstrip radiator and a substrate disposed between the radiator and the ground plane. Theory of microstrip antennas is also described in [4] "Small Antennas" ISBN 086380 048 3, pages 138-165.

10 The arrangement described in US 5 982 335 includes low magnetic reluctance material on the surface of the ground plane. The purpose of the low magnetic reluctance material is thus to influence the radiation pattern of the antenna. It would be possible to use this kind of microstrip antenna inside a mobile station, but there are certain drawbacks related with this prior art solution as well.

15 Firstly, the dielectric substrate of a microstrip antenna takes a lot of space within the housing of the mobile station, and therefore the size of the housing would become too large, or the space available for other electronics would become too small. Another drawback is the fact that while the antenna would be located just next to the electronics circuits, the radiation of the antenna could cause RF interference to the electronics. The low magnetic reluctance material on the surface of the ground plane  
20 affects the radiation pattern of the antenna by, for example, attenuating the radiation intensity in the direction opposite to the radiator. However, a microstrip antenna tends to cause high radiation intensity in small areas in the nearest surrounding area of the antenna.

25 A further drawback is related to the fact that it is difficult to connect a microstrip antenna to the RF electronics of a mobile station. The antenna element must first be equipped with connecting wires, next the printed wired board must and the antenna element must be installed within the housing, and finally the antenna wires must be soldered to the printed wired board. It is quite difficult to arrange these production phases within an automated production line, and thus manual assembly work may be  
30 required.

It is an object of the present invention to provide an antenna arrangement with which the disadvantages of prior art solutions would be reduced or avoided. It is especially an object of the present invention that an optimal electromagnetic

compatibility would be achieved with an antenna structure and overall assembly that is applicable to large scale mass production of mobile stations.

One idea of the present invention is providing a planar antenna in which the PWB of the mobile station is used. The planar antenna has preferably an air gap between the radiator plate and the ground plane. In order to reduce the effects of the RF currents in phone circuitry there is also a sheet of low reluctance material for absorbing the RF radiation. The sheet of low reluctance material is so located that it covers an area of the printed wired board which is not covered by the radiator element or the ground plane of the planar antenna. Preferably the low reluctance material covers a high RF intensity area on the printed wired board. This means that the low reluctance material is placed on side of the planar antenna. The low reluctance material is also preferably located at least partly at the same area of the printed wired board as the display unit of the mobile station, such as between the display unit and the printed wired board. The low reluctance material is preferably ferromagnetic material, such as flexible sheet of ferromagnetic material, and it is may be attached to the display unit or on the PWB.

The present invention has several important advantages over the prior art solutions. With the present invention it is possible effectively reduce the interference of the antenna's RF radiation to other electronics of a mobile station, because the low reluctance material effectively reduces the RF currents on the surface of the printed wired board. The antenna arrangement also has a radiation pattern that directs the radiation away from the user and thus makes the antenna efficiency high.

As the antenna is constructed above the printed wired board it is possible to use the antenna area of the PWB also for other electronic components and/or wiring. Therefore it is possible to make the size of the mobile station very small. Many possibilities are available for attaching the ferromagnetic sheet to the display unit or the PWB, because the attachment means do not affect the performance of the antenna. Advantages can be achieved by locating the low reluctance material at least partly between the display unit and the printed wired board. The area of the display unit is relatively large and therefore it is possible to place a ferromagnetic sheet with large area below the display unit. The wiring between the display unit and the PWB can be arranged to the edge of the display unit, and therefore the ferromagnetic sheet can be uniform. On the whole, the arrangement according to the present invention is extremely well suited for mass production, because all assembly phases can be provided on a single PWB assembly line.

The antenna arrangement of a mobile station according to the invention comprises  
- a planar antenna including a ground plane and a planar radiator element which is disposed substantially parallel to the ground plane, and

- 5       - a printed wired board which is located substantially parallel to said ground plane and said radiator element, wherein the ground plane covers a first area on the printed wired board and the radiator element covers a second area on the printed wired board.

It is characterized in that

- 10       - the arrangement comprises a layer of low reluctance material which layer is substantially parallel to the printed wired board and covers a third area on the printed wired board, and  
      - said layer of low reluctance material is so located that the third area on the printed wired board is at least in part outside said first and second areas on the printed wired board.

15

The invention applies also to a mobile station, comprising:

- a planar antenna including a ground plane and a planar radiator element which is disposed substantially parallel to the ground plane, and  
20       - a printed wired board which is substantially parallel to said ground plane and said radiator element, wherein the ground plane covers a first area on the printed wired board and the radiator element covers a second area on the printed wired board.

The invention is characterized in that

- 25       - the mobile station further comprises a layer of low reluctance material which layer is substantially parallel to the printed wired board and covers a third area on the printed wired board, and  
      - said layer of low reluctance material is so located that the third area on the printed wired board is at least in part outside said first and second areas of the printed wired board.

- 30       When an "area" covered on the printed wired board is referred in this context, the thickness of the printed wired board is disregarded.

- 35       The novel features which are considered as characteristic of the invention are set forth in particular in the appended Claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when read in connection with the accompanying drawings.

- Fig. 1 illustrates an cross section view of a prior art mobile station,
- Fig. 2 illustrates an exemplary antenna arrangement according to the invention,
- Fig. 3 illustrates a perspective view of an exemplary antenna arrangement according to the invention,
- Fig. 4 illustrates a cross section view of a mobile station with an exemplary antenna arrangement according to the invention, and
- Fig. 5 illustrates an assembly diagram of an exemplary mobile station according to the invention.

10 Figure 1 was already described in the prior art section above.

Figure 2 illustrates a cross section of an exemplary antenna arrangement according to the present invention. It comprises a ground plane 218 on a printed wired board 234, and a radiator element 216 which is connected to the ground plane from its edge, 219. The radiator element is substantially parallel with the ground plane and the printed wired board, and there is an air gap between the radiator element and the ground plate. The feed point of the radiator element is connected with a pin 312 to a printed wire of the PWB which is further connected to RF circuits 241 such as a duplex filter etc. In this arrangement ground plate and the radiator element of the planar antenna are located at the end of a printed wired board. Further details regarding planar inverted-L or -F antennas may be found in [5] "Small Antennas" ISBN 086380 048 3, pages 116-137.

According to the present invention there is a layer of low reluctance material 245 disposed on the printed wired board 234. The low reluctance material is eg. a sheet of ferromagnetic sheet. The low reluctance material is located further from the end of the printed wired board, between a display unit and the printed wired board. The display unit comprises a light guide or element with similar functionality 208a for providing illumination, and an LCD (Liquid Crystal Display) 208b. Figure 2 also shows an area 250 where the intensity of the RF currents would be relatively high if the low reluctance material 245 according to the present invention would not be applied.

Figure 3 illustrates a perspective view of an exemplary antenna arrangement according to the present invention. In this embodiment the radiator element 316 is

connected to the ground plane 318 from its other edge 319. The Figure 3 also shows the feed pin 312. The radiator element 316 covers the same area of the printed wired board as the ground plane 318. A ferromagnetic sheet 345 is applied on the other side of the printed wired board. The ferromagnetic sheet is located between the printed wired board 334 and a light guide 308a of the display unit which also includes an LCD 308b. The ferromagnetic sheet 345 covers an area 346 of the printed wired board. In this case, the area 346 does not overlap with the area 318. Figure 3 shows an area 350 where the intensity of the RF radiation would be relatively high if the low reluctance material 345 according to the present invention would not be applied. Figure 3 also illustrates some other electronics components 342 on the PWB.

Figure 4 illustrates a cross section of an exemplary mobile station which has an antenna arrangement according to the present invention. The antenna comprises a radiator element 416 and a ground plane 418 which is made of a metal layer of the PWB. There is an air gap 417 between the radiator element and the ground plate. According to the present invention there is a sheet of ferromagnetic material 445 on the other side of the PWB. The ferromagnetic sheet is located between the display unit and the PWB. The display unit consists of a light guide 508a and an LCD 508b.

Fig. 4 also shows the cover 404, the battery 405, the microphone 406, the keyboard 407 and the earpiece and other electronic components 442 of the mobile station. These parts of the mobile station are similar to the prior art solution as illustrated in Fig. 1.

Figure 5 illustrates an assembly diagram of an exemplary mobile station according to the present invention. The planar antenna comprises a radiator 516 which is attached to the printed wired board with a plastic frame 519. The frame serves as a support and keeps the radiator element on a fixed distance from the ground plate 518.

The sheet of low reluctance material 545 is attached to the light guide 508a of the display unit using a clip 548. The clip keeps the sheet of eg. ferromagnetic sheet firmly in place. These parts are then attached to the printed wired board together with the LCD 508b by eg. using a frame 508c. There is also a transparent, protective window 508d above the display unit. Another possibility to attach the low reluctance material is attaching the sheet on the printed wired board by eg. gluing.

Fig. 5 also shows some other parts of the mobile station; keyboard 572-575, microphone 506, cover 504, battery 505 and other electronics components 542.

It is to be understood that the embodiments and variations shown and described herein are merely illustrative of the principles of this invention and that various modifications may be implemented by those skilled in the art without departing from the scope and spirit of the invention. Especially, it is to be understood that the  
5 present invention is not in any way restricted to the mentioned forms or assemblies of the illustrated devices. And even if the described embodiments have concerned a preferred embodiment of inverted-F antennas with an air gap, it is clear that the invention can be applied with any kind of planar antenna structures.



## Claims

1. An antenna arrangement of a mobile station, comprising

- a planar antenna including a ground plane (218) and a planar radiator element (216) which is disposed substantially parallel to the ground plane, and

5 - a printed wired board (234) which is located substantially parallel to said ground plane and said radiator element, wherein the ground plane covers a first area on the printed wired board and the radiator element covers a second area on the printed wired board,

**characterized in that**

10 - the arrangement comprises a layer of low reluctance material (245) which layer is substantially parallel to the printed wired board and covers a third area on the printed wired board, and

- said layer of low reluctance material is so located that the third area on the printed wired board is at least in part outside said first and second areas on the printed wired  
15 board.

2. An antenna arrangement according to claim 1, **characterized** in that the low reluctance material covers a high intensity RF current area (250) on the printed wired board for reducing the RF current intensity on said area.

20 3. An antenna arrangement according to claim 1 or 2, **characterized** in that the low reluctance material is flexible ferrite sheet.

4. An antenna arrangement according to any of claims 1 - 3, wherein the mobile station includes a display unit, **characterized** in that the layer of low reluctance material is located between the display unit (208a, 208b) and the printed wired board (234).

25 5. An antenna arrangement according to claim 4, **characterized** in that the display unit comprises a light guide (208a) or element with similar function, and said layer of low reluctance material is attached to said light guide or element.

6. An antenna arrangement according to any of claims 1 - 3, **characterized** in that said low reluctance material is attached to the ground plane.

7. An antenna arrangement according to any of the preceding claims, **characterized** in that there is an air gap between the radiator element and the ground plane.

5 8. An antenna arrangement according to any of the preceding claims, **characterized** in that the ground plane is formed of a conducting layer of the printed wired board.

9. An antenna arrangement according to claim 8, **characterized** in that said the ground plane is formed of the conductive layer of the printed wired board which is nearest to the radiator element.

10 10. An antenna arrangement according to any of the preceding claims, **characterized** in that the planar antenna is located at the end of the printed wired board, and the low reluctance material is located at a distance from said end of the printed wired board.

15 11. An antenna arrangement according to any of the preceding claims, **characterized** in that said printed wired board connects said planar antenna to other electronics of the mobile station.

12. A mobile station, comprising:

- a planar antenna including a ground plane (518) and a planar radiator element (516) which is disposed substantially parallel to the ground plane, and

20 - a printed wired board (534) which is substantially parallel to said ground plane and said radiator element, wherein the ground plane covers a first area on the printed wired board and the radiator element covers a second area on the printed wired board,

**characterized** in that

25 - the mobile station further comprises a layer of low reluctance material (545) which layer is substantially parallel to the printed wired board and covers a third area on the printed wired board, and

30 - said layer of low reluctance material is so located that the third area on the printed wired board is at least in part outside said first and second areas of the printed wired board.

13. An antenna arrangement according to claim 12, **characterized** in that the low reluctance material covers a high intensity RF current area on the printed wired board for reducing the RF current intensity on said area.
14. A mobile station according to claim 12 or 13, **characterized** in that the low reluctance material is flexible sheet of ferromagnetic material.
15. A mobile station according to any of claims 12 - 14, wherein the mobile station includes a display unit (508a-508c), **characterized** in that the layer of low reluctance material (545) is located between the display unit and the printed wired board.
- 10 16. A mobile station according to any of claims 12-15, **characterized** in that the planar antenna is located at the end of the printed wired board, and the low reluctance material is located at a distance from said end of the printed wired board.
- 15 17. A mobile station according to any of claims 12-16, **characterized** in that said printed wired board connects said planar antenna to other electronics of the mobile station.

**(57) Abstract**

The invention concerns generally the technological field of antenna arrangements in mobile stations. The invention also concerns a mobile station equipped with such an antenna arrangement. One idea of the present invention is providing a planar antenna in which the printed wired board (PWB) of the mobile station is used. The planar antenna has preferably an air gap between the radiator element (216) and the ground plate (218). In order to reduce the effects of the RF fields to other phone electronics there is a sheet of low reluctance material (245) for reducing the RF fields. The sheet of low reluctance material is so located that it covers an area of the printed wired board which is not covered by the radiator element or the ground plane of the planar antenna. The low reluctance material is preferably ferrite material, such as flexible ferrite sheet, and it may be attached to the display unit (208a, 208b) or on the PWB (234).

Fig. 2

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

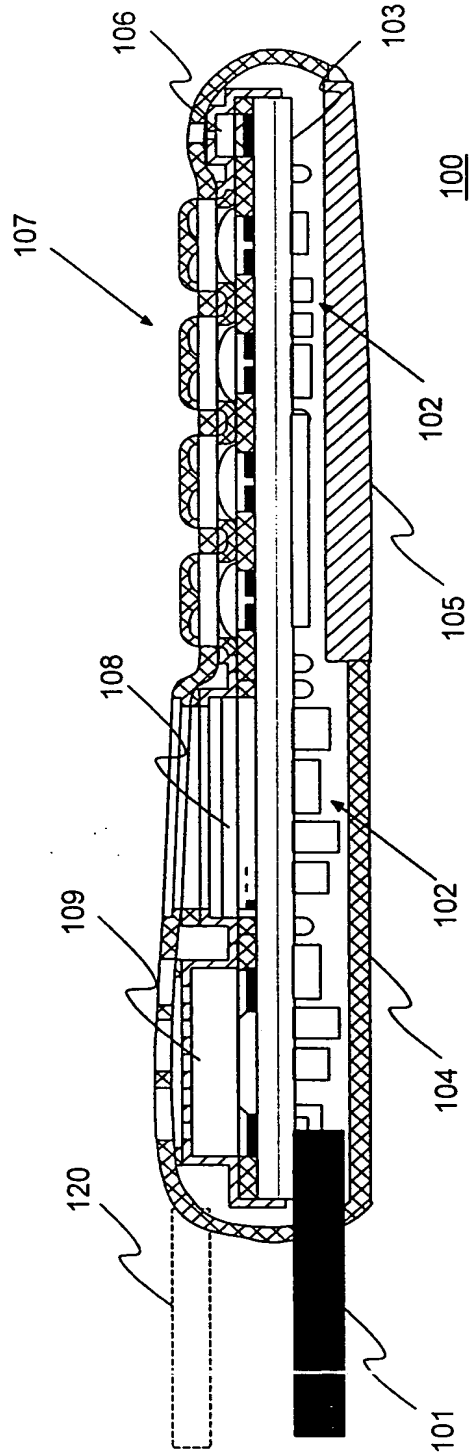


Fig. 1  
PRIOR ART

2709300 000133

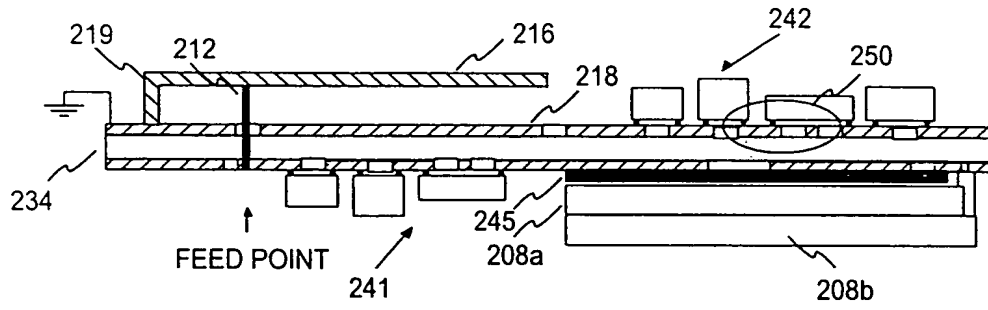


FIG. 2

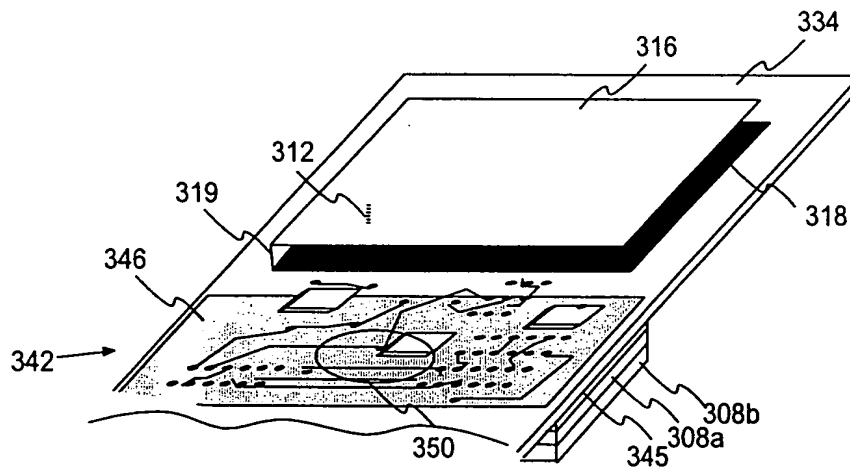


FIG. 3

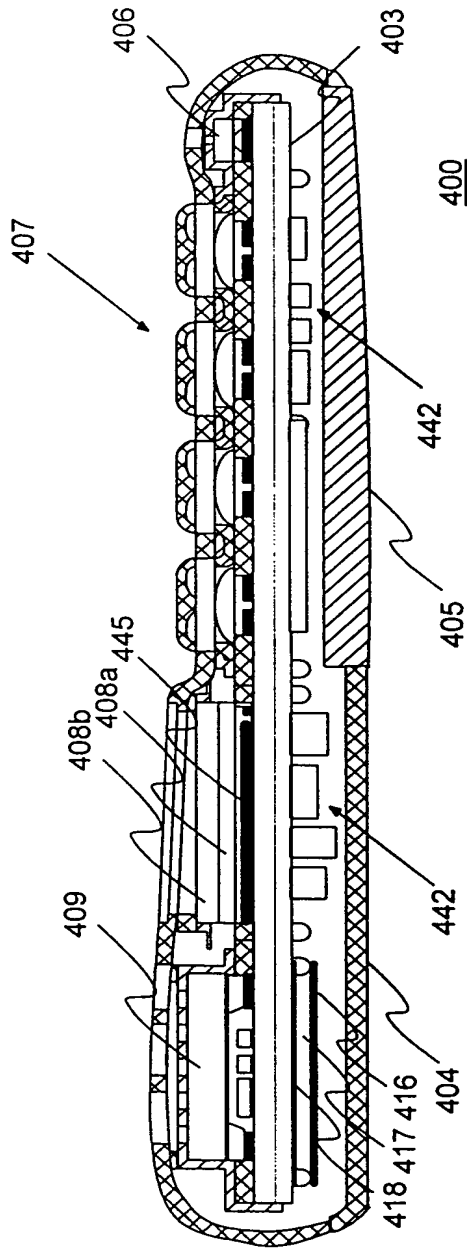


Fig. 4

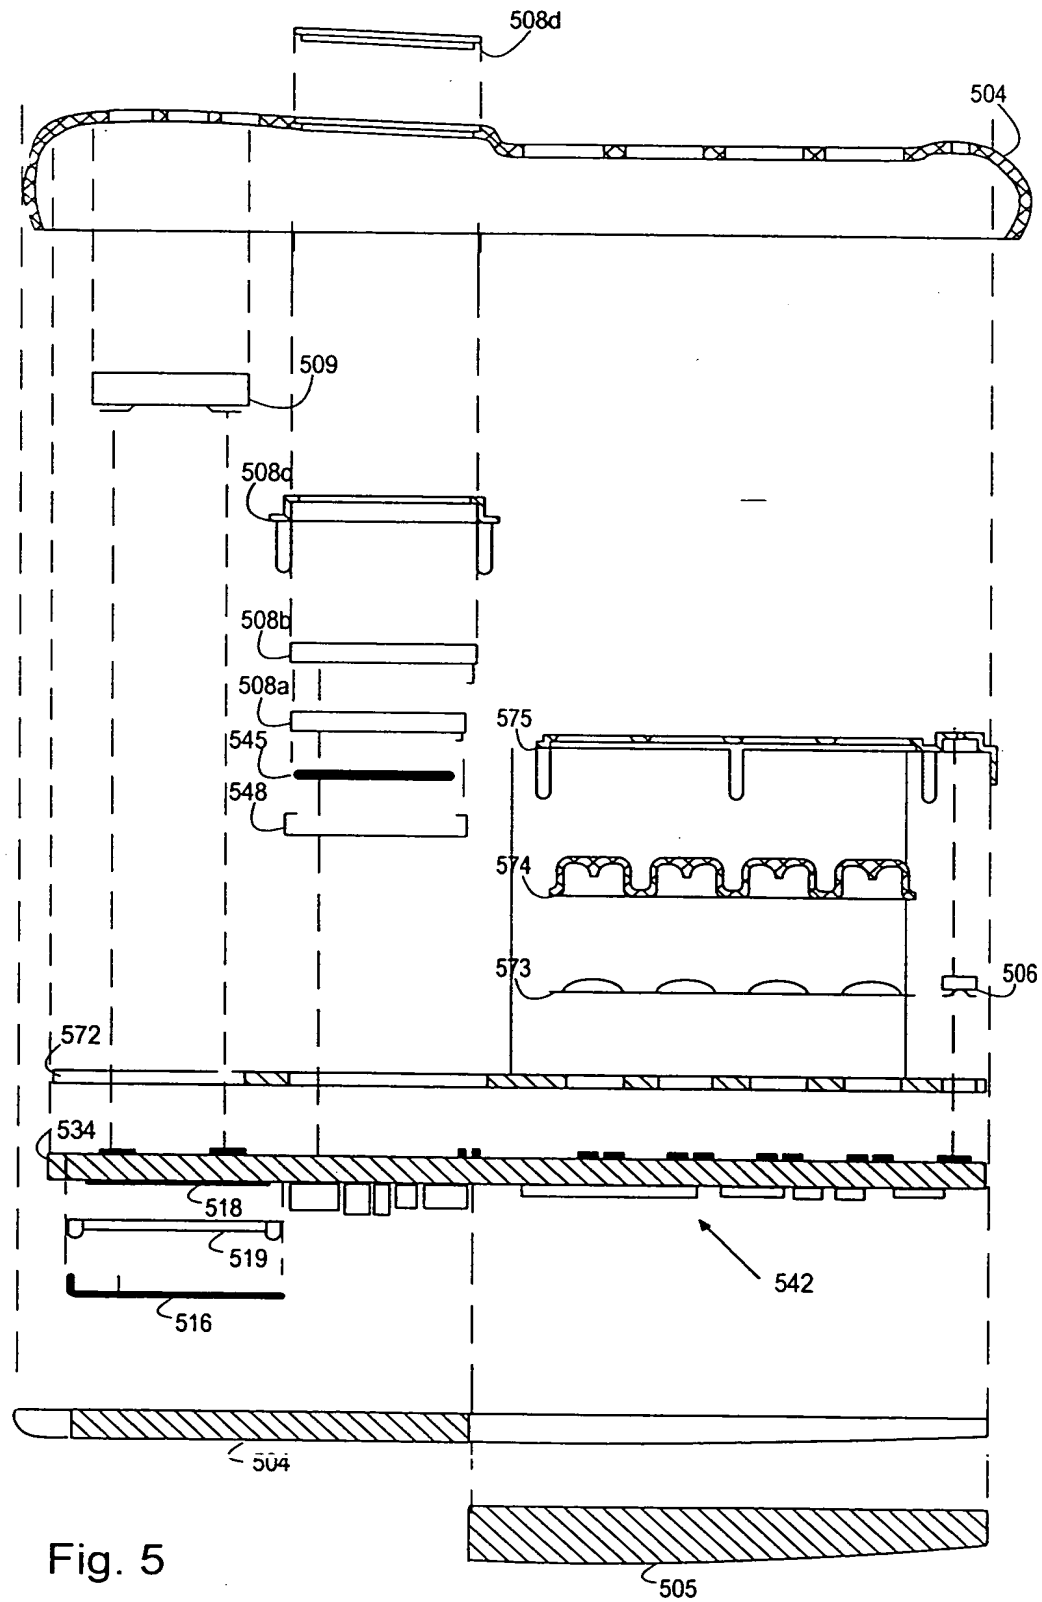


Fig. 5